

Wilcoxon Research®

High temperature, side exit accelerometer HT787A



For applications in which extremely high temperature operation is needed, Meggitt offers the HT-series of accelerometers. Dryer sections of a paper machine regularly create conditions up to 150° C. Vibration monitoring sensors must be capable of operating continuously in hot environments without degradation. HT-series sensors are built with extended range components that are manufactured to withstand high temperatures for long periods of time without failing.

The side-exit Wilcoxon Research® 100 mV/g broadband sensor operates at high temperatures for monitoring machine vibration on a wide range of rotating equipment such as motors, pumps, fans, compressors, turbines and generators. The captive screw permits orientation at any angle facilitating mounting in close fitting locations and minimizing cable strain. The 316L stainless steel case provides rugged durability for most extreme environments. The sensing element is housed in a case-isolated Faraday shield, providing maximum protection from ground loops and RF interference.


Key features

- Mounts in any orientation
- Hermetically sealed
- ESD-protected
- Reverse wiring protection
- Manufactured in an approved ISO 9001 and AS9100 facility

Certifications



Connections	
Function	Connector pin
power/signal	A
common	B
ground	shell

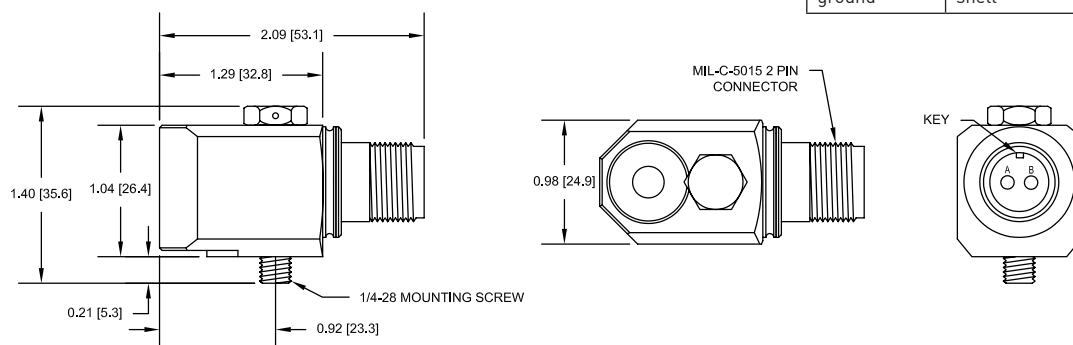

Meggitt Sensing Systems

Our energy product competencies and services

Machinery protection | Condition monitoring | Integrated performance monitoring | Partial discharge monitoring | Sensors for extreme environments
Ignition systems | Flame detection and analysis | **Industrial monitoring solutions** | Nuclear products

99197 Rev A 11/13

MEGGITT
smart engineering for
extreme environments

Wilcoxon Research®

High temperature, side exit accelerometer HT787A

Specifications

	English		Metric	
Sensitivity, ± 5%, 25° C	100 mV/g		9.8 mV/m/sec ²	
Acceleration range, VDC >25 V	80 g peak		784 m/sec ²	
Amplitude nonlinearity	1%		1%	
Frequency response	± 10%	60 - 300,000 CPM	1 - 5,000 Hz	
	± 3 dB	42 - 600,000 CPM	0.7 - 10,000 Hz	
Resonance frequency, nominal	1,320 kCPM		22 kHz	
Transverse sensitivity, max	5% of axial		5% of axial	
Temperature response	-25° C	-10%	-10%	
	+150° C	+15%	+15%	
Voltage source	18 - 30 VDC		18 - 30 VDC	
Current regulating diode	2 - 10 mA		2 - 10 mA	
Electrical noise, equiv g		25° C	150° C	25° C
	Broadband 2.5 Hz to 25 kHz	700 µg	1100 µg	6.9 x 10 ⁻³ m/sec ²
	Spectral			150° C
	10 Hz	10 µg/√Hz	14 µg/√Hz	9.8 x 10 ⁻⁵ m/sec ² /√Hz
	100 Hz	5 µg/√Hz	7 µg/√Hz	4.9 x 10 ⁻⁵ m/sec ² /√Hz
	1000 Hz	5 µg/√Hz	7 µg/√Hz	4.9 x 10 ⁻⁵ m/sec ² /√Hz
				6.9 x 10 ⁻⁵ m/sec ² /√Hz
Output impedance, max	100 Ω		100 Ω	
Bias output voltage	+25° C	13 VDC	13 VDC	
	+150° C	12 VDC	12 VDC	
Grounding	case isolated, internally shielded		case isolated, internally shielded	
Temperature range	-58 to +302° F		-50 to +150° C	
Vibration limit	500 g peak		4,900 m/sec ² peak	
Shock limit	5,000 g peak		49,000 m/sec ² peak	
Electromagnetic sensitivity, equiv g, max	70 µg/gauss		6.9 x 10 ⁻⁴ m/sec ² /gauss	
Sealing	hermetic		hermetic	
Base strain sensitivity, max	0.0002 g/µstrain		1.9 x 10 ⁻³ m/sec ² /µstrain	
Sensing element design	PZT, shear		PZT, shear	
Weight	5.11 oz		145 g	
Case material	316L stainless steel		316L stainless steel	
Mounting	1/4-28 UNF tapped hole		1/4-28 UNF tapped hole	
Mating connector	2 pin, MIL-C-5015 style		2 pin, MIL-C-5015 style	
Recommended cabling	J9F, J9T2A		J9F, J9T2A	

Accessories supplied: SF6 mounting stud (metric mounting available), calibration data (level 2)

Note: Due to continuous process improvement, specifications are subject to change without notice.

This document is cleared for public release.

Contact

Meggitt Sensing Systems

20511 Seneca Meadows Parkway
Germantown MD 20876, USA
Tel: +1 (301) 330 8811
Fax: +1 (301) 330 8873
wilcoxon@meggitt.com
www.wilcoxon.com
www.meggitt.com

Meggitt Sensing Systems

Our energy product competencies and services

Machinery protection | Condition monitoring | Integrated performance monitoring | Partial discharge monitoring | Sensors for extreme environments
Ignition systems | Flame detection and analysis | **Industrial monitoring solutions** | Nuclear products

MEGGITT
smart engineering for
extreme environments